

EXCAVATOR TRACTOR **CAB INSTRUCTIONS** (5 PANEL ASSEMBLY)

IMPORTAN

IMPORTANT: IIS PRODUCT DOES **NOT PROVIDE** FALLING OBJECT **PROTECTION**



TO AVOID PERSONAL INJURY:

- Position the tractor on level ground
- Place loader bucket flat on ground (if equipped)
- Apply parking brake
- Shut off engine
- Remove key





TRANSPORTING:

When transporting the tractor with a canopy, or cab enclosure, at highway speeds removal would be ideal, unless the tractor is being transported in a closed trailer — otherwise, make sure the tractor is positioned and secured to prevent wind damage to the canopy or cab enclosure.



BEFORE YOU PROCEED... It is very important that you follow these instructions for a proper fit of the Top and Enclosure on your tractor. Please follow the mounting instructions on the following pages. When fitting, make sure the edges of the enclosure match the fenders and floor board. If you have any questions about installation please contact customer service at (904) 316-0532 or (904) 394-0706. Visit our website at CoverMyTractor.com for other installation instructions.

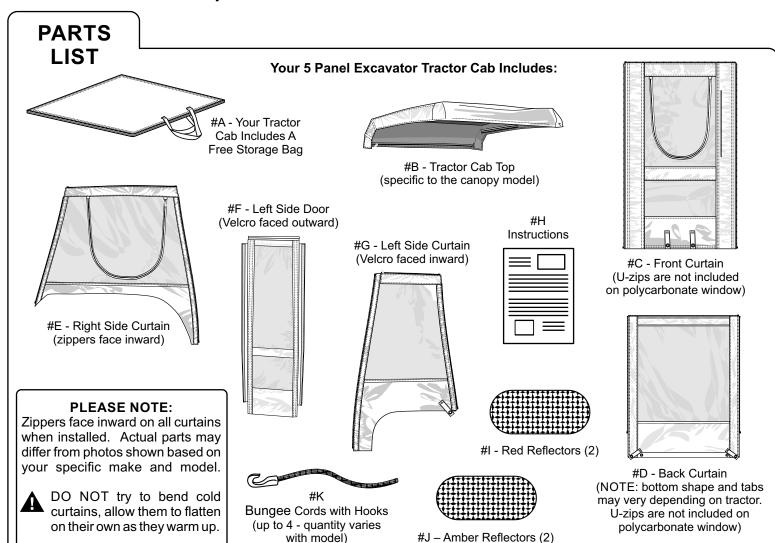

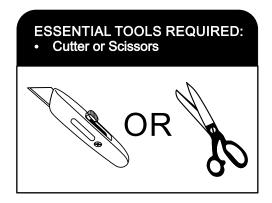

STEP 1 UNPACKING THE CONTENTS:

Your Cover My Tractor Cab comes with a storage bag (Part #A). Pull apart the Velcro of the flat storage bag and remove all the curtains. Try to keep packaging material in as good as shape as possible so you can reuse it when you restore the cab back into the bag. Lay all the curtains out on a flat surface, at room temperature, so they will relax and flatten out before installing.




IMPORTANT:

DO NOT TRY TO BEND WHEN CAB PARTS ARE COLD, this may cause cracking or breaking of clear plastic parts or synthetic materials made ridged by cold weather.


STEP 2 INSTALL THE TOP COVER OVER THE TRACTOR CANOPY:

Locate the Tractor Cab Top (Part #B). The tag is located in the BACK of the top. There are zippers located on the front, back, right side, and half zipper on the left side (alongside the track). The Excavator will only have ONE white rope track on the side (usually the left). Reference Diagram 2.




ZIPPERS ALL FACE INSIDE OF CAB ON ALL CURTAINS.


- Pull the top cover over the tractor canopy and pull down around the canopy sides it should hang evenly all the way around.
- Some models may come with reflectors. If your model comes with reflectors than, once the top is in place, install the red reflectors on the back and the amber reflectors on the front, as in Diagram 2a





Make sure the top is centered with the canopy and tractor operator compartment.

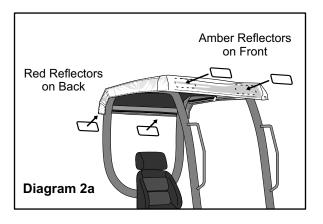

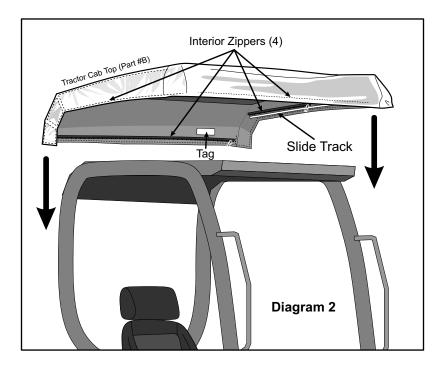

STEP 3

BACK CURTAIN INSTALLATION:


Locate the Back Curtain (Part #D), zip it to the rear inside zipper on the Cab Top (Part #B) and let it hang freely. See Diagram 3.


STEP 4 FRONT CURTAIN INSTALLATION:


Next is the FRONT panel, zip the panel to the top and be sure that the panel is hanging freely as in Diagram 4.

There are cuffs that secure the front curtain to the Roll over bars - wrap around the Roll Bars and velcro together as in Detail 4c.

NOTE: The front curtain will have area's sewn around for the handles. They will need to be split with scissors or a knife to allow the handles to come through the curtain as in Diagram 4b. The material can be cut for this purpose and will not tear or fray.

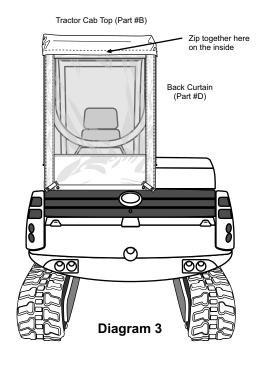


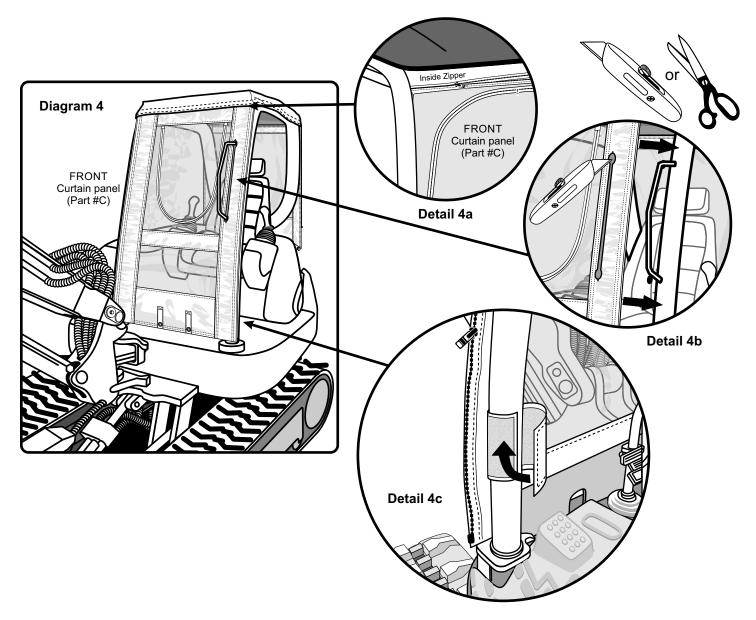

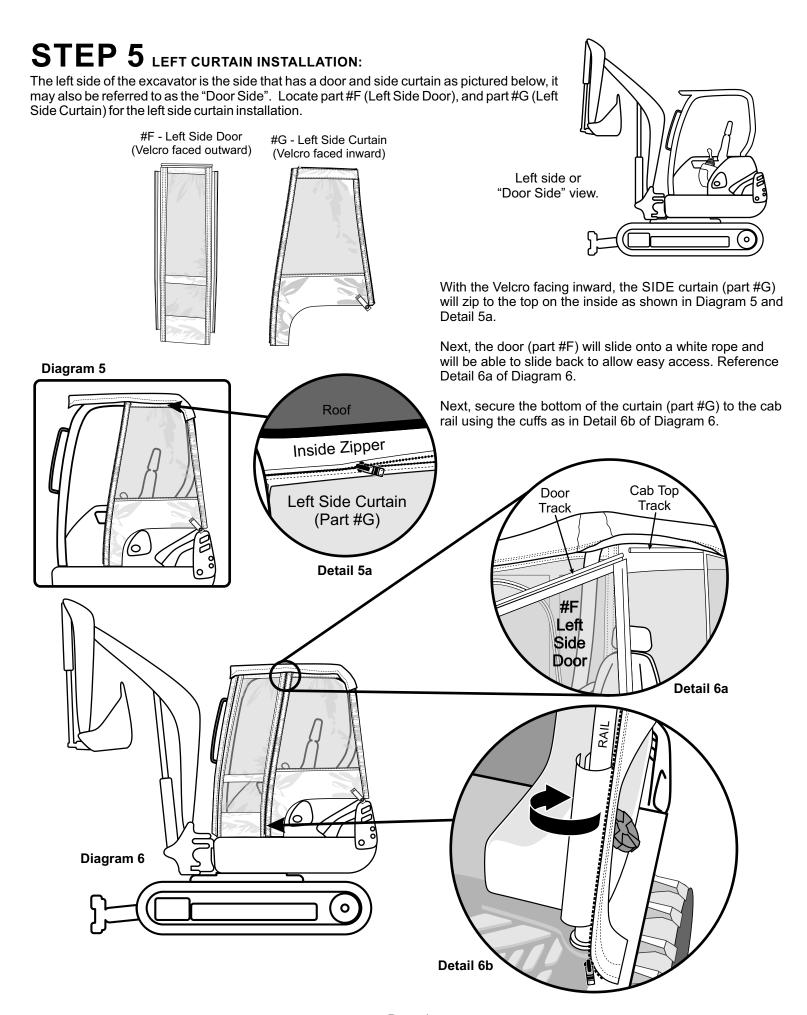

STEP 6 RIGHT CURTAIN INSTALLATION:


Locate the Right Side Curtain (Part #E) NOTE: The Right Side Curtain is one piece with NO door. With the zippers facing inward, zip the Right Side Curtain to the top and let it hang freely as in Diagram 7. Then zip the back side to the back curtain and the front side to the front curtain.

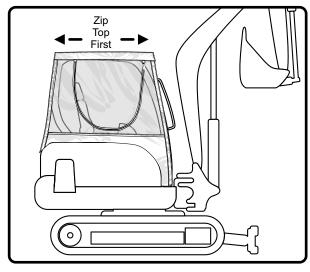


STEP 7 SECURING THE CURTAINS:

The back and side curtains should be secured with the bungee cords (part #K) as shown in Diagram 8 and Detail 8a. Pull the cord end through the grommets on each tab of the back and side curtains. Tie knots into the bottom to hold them in place at the proper length to maintain a taught attachment, as in Detail 8b.

Diagram 7

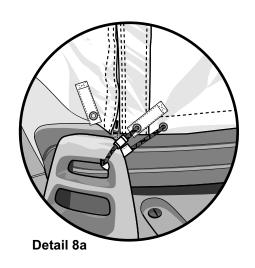

NOTE: The <u>SIDE</u> curtains have attachment areas for a bungee if needed, but not required. See Detail 8a.

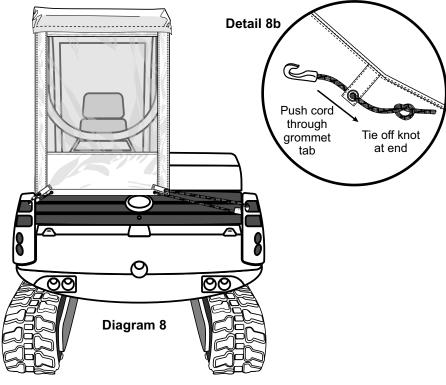



Take care not to attach the bungee cords around parts of the tractor that will be hot, in order to avoid melting or damaging them. Be sure not to attach them to any moving parts, or in places where they may be pinched or severed.

Enjoy the enclosure and if you have any questions, comments, or concerns, please do not hesitate to contact our customer service at (904) 316-0532 or (904) 394-0706.



CARE AND MAINTENANCE:

Wash canopy with mild dish soap or use 401, 402 and 403 cleaning products from our website. Rinse and dry off immediately with a soft cloth or chamois. Care products can be found on our website COVERMYTRACTOR.COM.


Cover My Tractor, LLC

3145 E Chandler Blvd. Ste. 110-401 Phoenix, AZ 85048 Phone: (904) 316-0532 or (904) 394-0706 www.covermytractor.com

CONVENIENCE FEATURES:

- Once the door (part #F) is installed on its track you have the options of zipping the door to close and secure it, or use the Velcro strips along the sides for a more convenient access, as in Diagram 9. *NOTE: For emergency purposes DO NOT zip the left door closed while in use Velcro fasten only.
- If your cab comes with U-zip front and side windows, make sure the windows are clean of debris before rolling up; you may roll up the window after unzipping the U-zip. Use the roll up straps to wrap around the rolled up window and fasten back to the roll up strap. Reference Diagram 10.
- There is Velcro at the bottom of the door (part #F) which can be used to fold up and secure the bottom of the door so that it may be slid back out of the way to the side of the seat, above the wheel fender inside the cab. See Diagrams 12 and 12a.
- The tractor cab material is coated on both sides so it can be cut without fear of running for such accessories as lights, mirrors, etc.





NOTE: U-zips are not included on

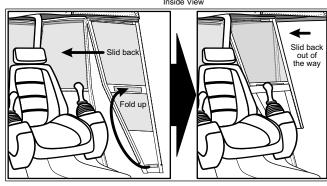


Diagram 9

Diagram 10

Diagram 11

Diagram 11a

RECOMMENDED PRODUCTS OF INTEREST









Click Links Above or Call 904-316-0532